


9. ACIS (Acoustic Control Induction System)

General

The ACIS is realized by using a bulkhead to divide the intake manifold into 2 stages, with an intake air control valve in the bulkhead being opened and closed to vary the effective length of the intake manifold in accordance with the engine speed and throttle valve opening angle. This increases the power output in all ranges from low to high speed.

► System Diagram ◀

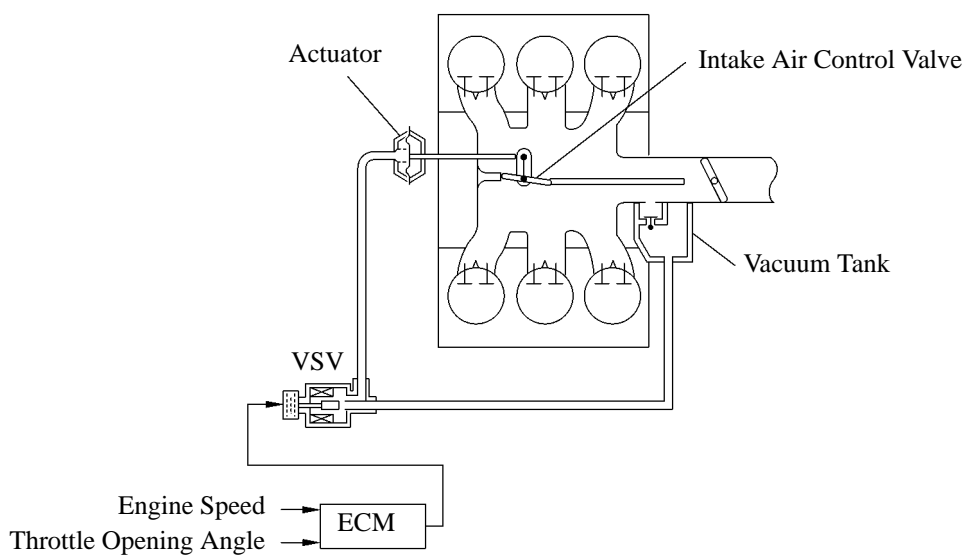

238EG77


Construction

1) Intake Air Control Valve

The intake air control valve, which is provided in the intake air chamber, open and close to change the effective length of the intake manifold in two stages.


2) Vacuum Tank

Equipped with an internal check valve, the vacuum tank stores the vacuum that is applied to the actuator in order to maintain the intake air control valve fully closed even during low-vacuum conditions.

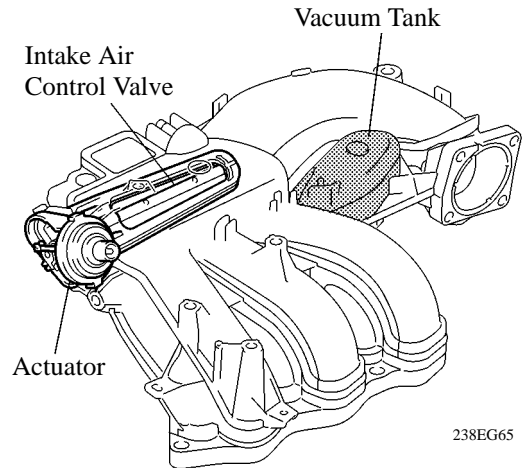

3) VSV (Vacuum Switching Valve)


Controls the vacuum that is applied to the actuator by way of the signal (ACIS) that is output by the ECM.

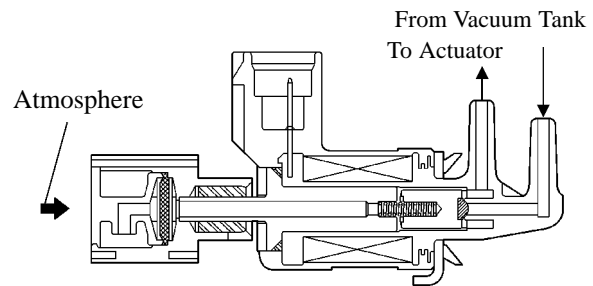

Operation

1) When the Intake Control Valve Closes (VSV ON)


The ECM activates the VSV to match the longer pulsation cycle so that the negative pressure acts on the diaphragm chamber of the actuator. This closes the control valve. As a result, the effective length of the intake manifold is lengthened and the intake efficiency in the medium speed range is improved due to the dynamic effect of the intake air, thereby increasing the power output.

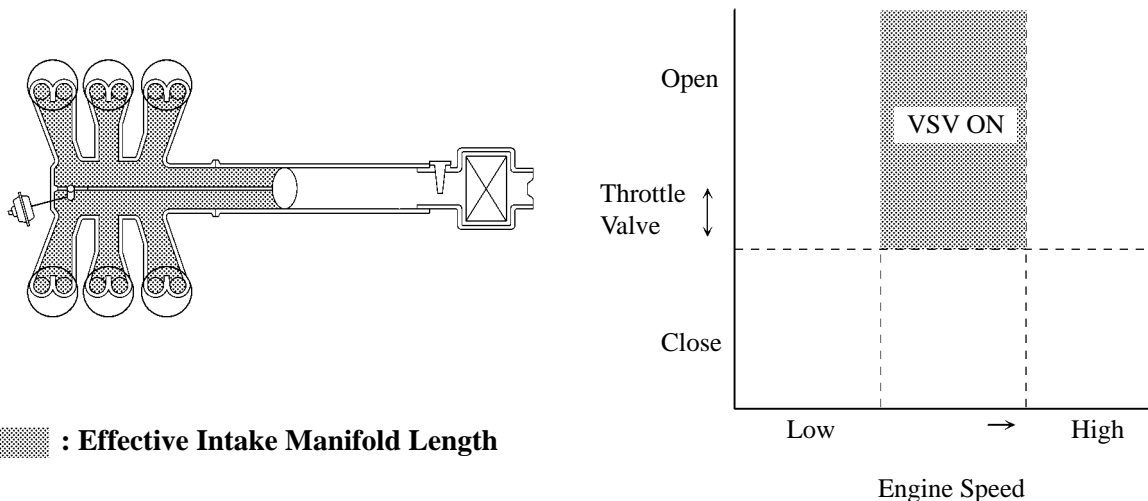

238EG71

2) When the Intake Control Valve Open (VSV OFF)

The ECM deactivates the VSV to match the shorter pulsation cycle so that atmospheric air is led into the diaphragm chamber of the actuator and opens the control valve. When the control valve is open, the effective length of the intake air chamber is shortened and peak intake efficiency is shifted to the low-to-high engine speed range, thus providing greater output at low-to-high engine speeds.

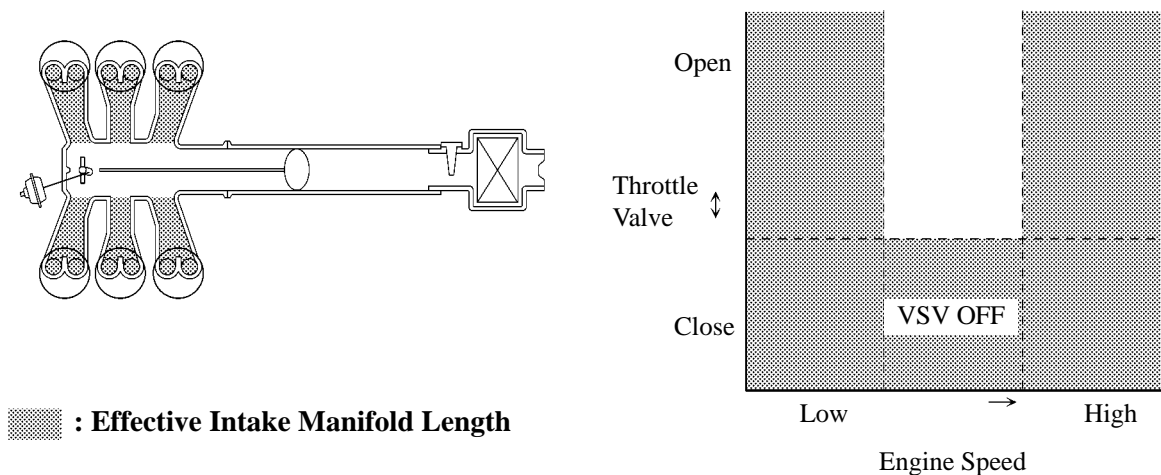

238EG66

10. Fuel Pump Control

- A fuel pump speed is controlled by the fuel pump relay and the fuel pump resistor.
- A fuel cut control is adopted to stop the fuel pump when the airbag is deployed at the front or side collision. In this system, the airbag deployment signal from the airbag sensor assembly is detected by the ECM, which turns OFF the circuit opening relay. After the fuel cut control has been activated, turning the ignition switch from OFF to ON cancels the fuel cut control, and the engine can be restarted.

